


STIX B

User manual



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
2. No supplied water-proof box, installation should be advised by qualified professional.
3. The external flexible cable can not be replaced. If the cable is damaged, the luminaire should be discarded.

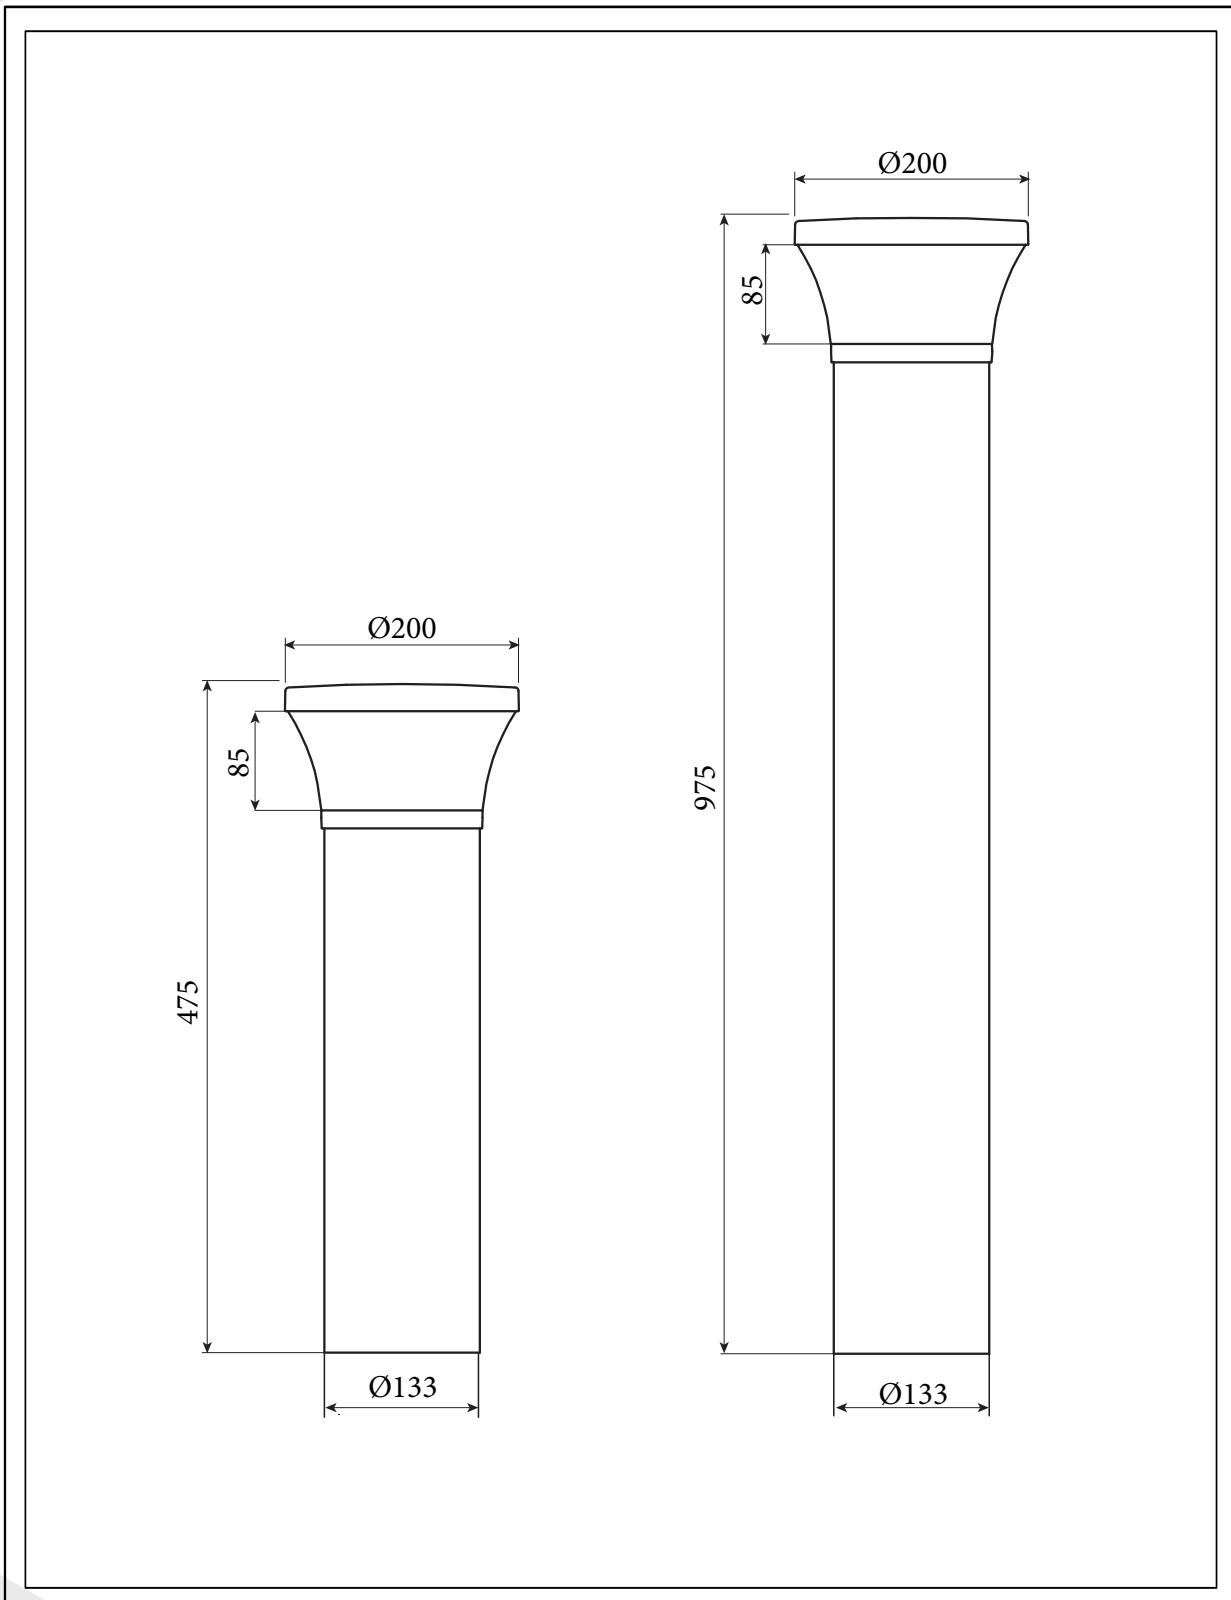

Packing List		
	Base plate templates	1PCS
	Screw fixing plate	1PCS
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS




1 m






0.5m

Physical Dimensions(unit:mm/inch)

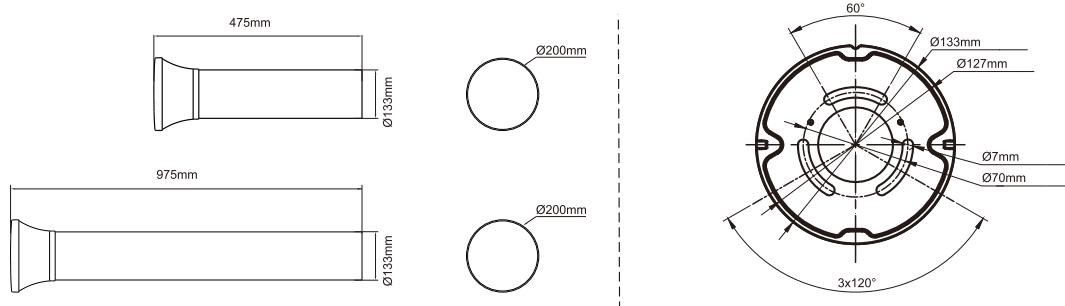


Installation

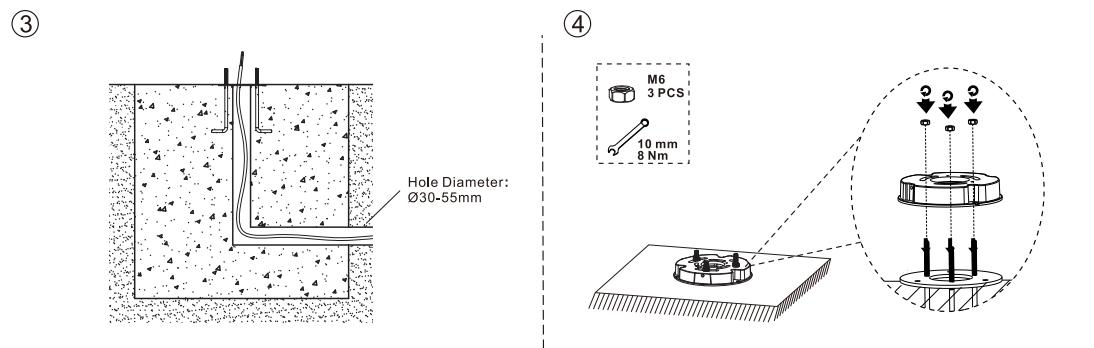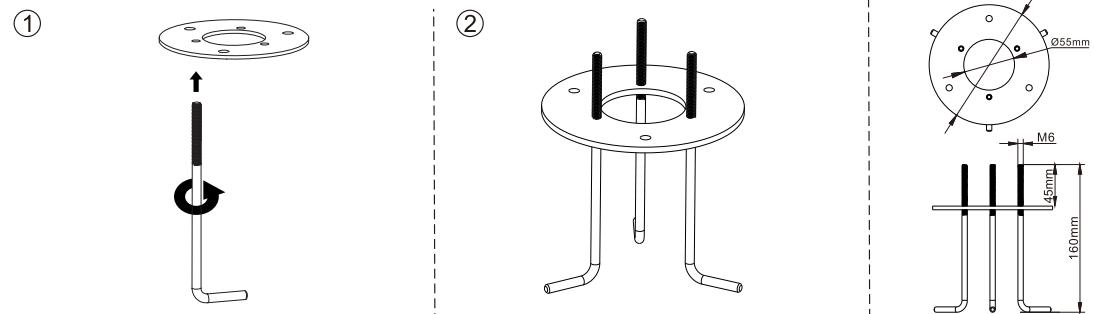


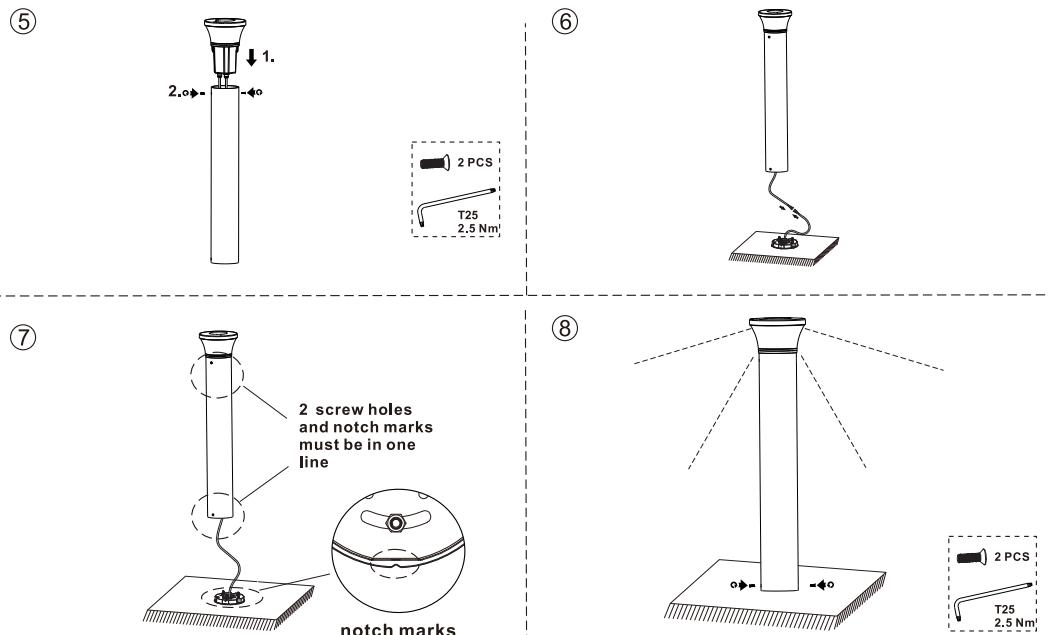
CCT+Power selectable(Optional)

*roughly ratio, subject to change to various drivers.

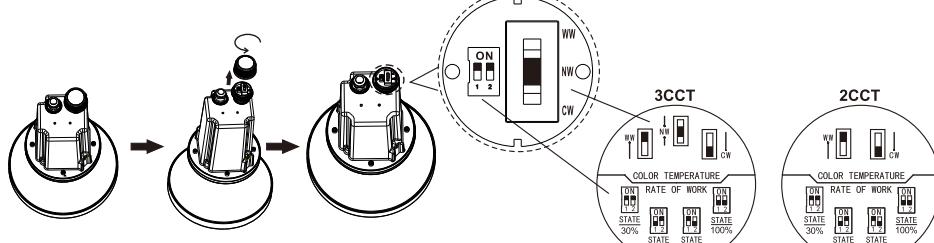

Product Specifications	14W		25W			
Input Voltage	220-240 VAC					
Power Frequency	50 / 60 Hz					
Outlook Dimensions	Ø133x475mm	Ø133x975mm	Ø133x475mm	Ø133x975mm		
Net Weight	3.8±0.3kg		5.3±0.3kg			
Working Temperature	-30°C to + 45°C					
Storing Temperature	-40°C to + 70°C					

Dimmable


Warning! do not wire dim cord to high voltage, or dim function will fail.

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.